


Overview

HP introduces the next generation of SATA drives that are designed for the reliability and larger capacities demanded by today's entry server and external storage environments. The new SATA portfolio will now be categorized into two categories: Entry (ETY) and Midline (MDL) drives. HP SATA Entry drives are the lowest unit-cost solution for entry-level servers. HP SATA Midline drives are designed with economical reliability and performance for external storage, backups and archival applications. These high capacity drives provide the lowest \$/GB to our customers. Both Entry and Midline SATA drives provide the best price advantage for non-mission critical applications with low workloads of 40% or less. HP SATA drives are available in both 3.5" and 2.5" form factors and ship with a standard one year warranty.

All HP hard drives pass a rigorous qualification process, which ensures that every HP drive is proven to perform in your HP ProLiant server. Before final certification, all HP SATA hard drives are optimized for compatibility and functionality, including support of SMART and HP Systems Insight Manager.

*S.M.A.R.T.: Self Monitoring Analysis and Reporting Technology, first developed at HP, detects possible hard disk failure before it occurs, allowing replacement of the component before failure occurs.

NOTE: For additional information regarding the different features of SATA Entry drives please visit the SATA hard drive website: www.hp.com/go/SATA

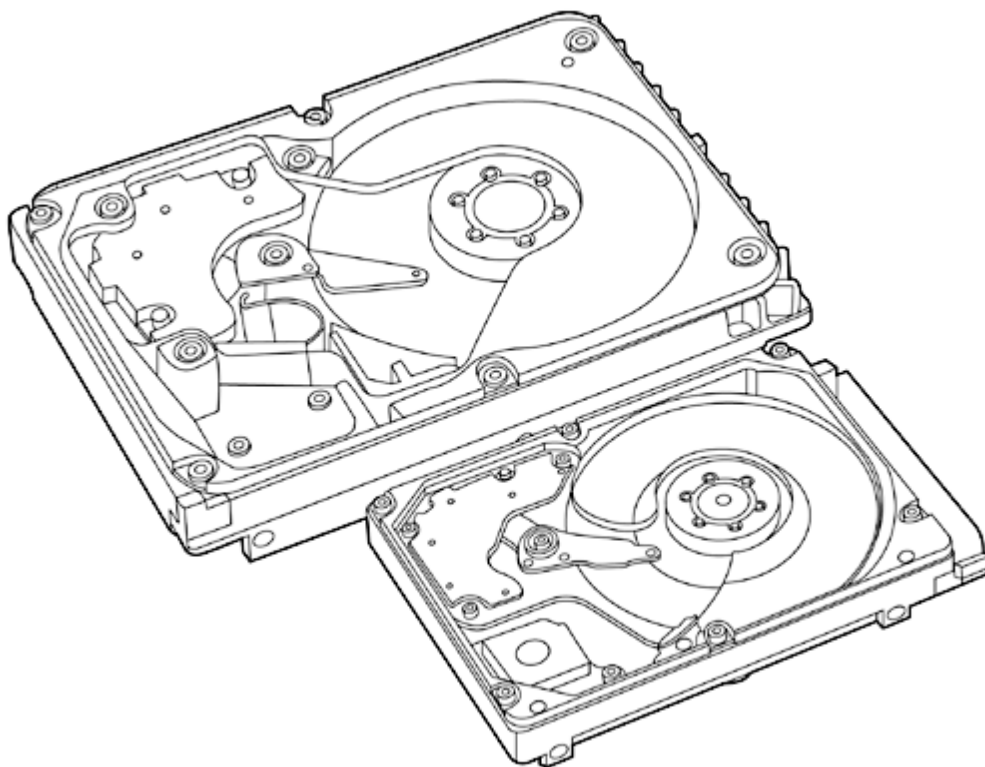

What's New

- Announcing the next generation of SATA drives, SATA Midline Drives, with more robust features such as increased reliability, workload management, rotational vibration sensors and native command queuing (NCQ).

Overview

Models

NOTE: SATA Drive Write Cache is disabled by default to minimize the risk of data loss in case of power loss. For information on how to enable Drive Write Cache on SATA drives via supported controllers and HBAs and what precautions should be followed please visit: www.hp.com/go/SATA

SATA Hot Plug Entry (ETY) Drives

HP 120GB 1.5G SATA 5.4K SFF ETY HDD 458924-B21

HP 160GB 3G SATA 7.2K 3.5" ETY HDD 458945-B21

SATA Non-Hot Plug Entry (ETY) Drives

HP 120GB 1.5G SATA 5.4K NHP SFF ETY HDD 459357-B21

HP 160GB 3G SATA 7.2K NHP 3.5" ETY HDD 458947-B21

SATA Hot Plug Midline (MDL) Drives

HP 250GB 3G SATA 7.2K 3.5" MDL HDD 458926-B21

HP 500GB 3G SATA 7.2K 3.5" MDL HDD 458928-B21

HP 750GB 3G SATA 7.2K 3.5" MDL HDD 458930-B21

HP 1TB 3G SATA 7.2K 3.5" MDL HDD 454146-B21

SATA Non-Hot Plug Midline (MDL) Drives

HP 250GB 3G SATA 7.2K NHP 3.5" MDL HDD 458939-B21

HP 500GB 3G SATA 7.2K NHP 3.5" MDL HDD 458941-B21

HP 750GB 3G SATA 7.2K NHP 3.5" MDL HDD 462595-B21

Standard Features

Drive Quality

Today's entry-level servers and external storage solutions are seeing an increase in maximum storage capacity and demand for increased levels of drive quality. In the often-changing entry-level server and storage environment, storage has become a critical component of the information system, significantly defining both the systems reliability. This is why HP drives undergo an intense qualification process that eliminates firmware and O/S incompatibilities. All drives are proven to perform in the HP ProLiant and StorageWorks Modular Smart Array (MSA) storage systems for which they were designed.

Performance

Only those drives whose quality is suitable for an entry-level, external storage enclosures and server environments are selected through the HP qualification process. All our drives are proven to be reliable in the ProLiant server and MSA storage environment.

Native Command Queuing

Native Command Queuing (NCQ) is a technology designed to increase performance of SATA hard disk drives by allowing the individual hard disk to internally optimize the order in which received read and write commands are executed. This can reduce the amount of unnecessary going back-and-forth on the drive's heads, resulting in increased performance for workloads where multiple simultaneous read/write requests are outstanding, most often occurring in server or storage-type applications. Without NCQ the drive has to process and complete one command at a time. For NCQ to be enabled, it must be supported and turned on in the controller and in the hard drive itself.

NOTE: Please reference the [HP Smart Array Controller website](http://www.hp.com/products/smartarray) for NCQ enabled controllers at:

<http://www.hp.com/products/smartarray>.

Please see SATA hard drive Technical Specifications section for specific capacities supported with NCQ.

Integration

Many issues customers have with third party Serial-ATA drives are integration related issues. When buying from another supplier, there is no guarantee that a drive has been correctly set for proper operation with ProLiant entry-level servers or MSA enclosures. These incompatibilities can create problems in configuration, can rob your system of performance, or at their worst, can result in data corruption. HP hard drives are specifically designed and tested for flawless operation in your HP equipment. The integration of hard drives in HP systems means that cables, controllers, and firmware are right for your ProLiant entry level server or MSA enclosures.

Pre-Failure Alert

When used in conjunction with a SMART Array Controller and Systems Insight Manager, the SMART capable firmware in HP hard drives enables extensive fault prediction capabilities. If potential problems develop in one of the drives, the Smart Array Controller, Systems Insight Manager and/or SMART hard disk drive lets you know in advance so you can have the drive replaced, before it fails, under the HP Pre-Failure Warranty.

NOTE: All drives are protected by a Pre-Failure Alert when used with a HP Smart Array controller and Systems Insight Manager, allowing hard drives to be replaced before failure free of charge. In addition, all drives are covered by a one to three-year limited on-site warranty, or the remaining warranty of the HP CPU in which it is installed (up to one year).

NOTE: SATA hard drives have a one year limited warranty regardless of the warranty period for the system in which they are installed. Please see the below HP Care Pack Information section for additional services.

Server and Storage Support

Please see the following URL for the latest list of supported servers and enclosures:

<http://www.hp.com/servers/hdd-documentation>

Service and Support, HP Care Pack, and Warranty Information

HP Care Pack Information Keeping industry standard systems truly available requires high-quality service with a single point of contact. The HP Care Pack program is tailored specifically to protect your HP ProLiant system and options. These convenient packages allow you to maximize server utilization and performance with fewer resources. Care Pack services provide a range of life cycle support options that let you choose the service levels that meet your business requirements, from basic to mission-critical. A full range of HP Care Pack hardware and software services are available including:

- Installation and start up
- Education courses
- Extended onsite hardware coverage hours from Next Business Day to 24 hours a day, 7 days a week with options including 4-hour response or 6-hour Call To Repair
- Comprehensive range of software technical support for Microsoft and Linux-based IT solutions helping to deliver high level of application availability.
- Response times range from 30 minutes for critical problems to 2 hours.
- System management, performance services and Mission Critical Support Solution

HP Premium integrated hardware and software support and Mission Critical offers are available either as Care Pack offers or as tailored solutions to meet your business needs. These solutions deliver high levels of application availability. Delivered by experienced, certified engineers, these packages help you maximize server utilization and performance with fewer resources. Available as Support Plus, Support Plus 24, Proactive 24, Critical Services and Mission Critical Partnership.

NOTE: For more information on HP Care Pack services, contact any of our worldwide sales offices or resellers or visit our worldwide Web site on the internet at: <http://www.hp.com/hps/carepack>

NOTE: For more complete information on HP Services offerings, customers and resellers, please visit us at: <http://www.hp.com/hps>

NOTE: Additional information regarding worldwide limited warranty and technical support is available at: <http://h18004.www1.hp.com/products/servers/platforms/warranty/index.html>

Technical Specifications

SATA Hot Plug Entry (ETY) Drives

HP 120GB 1.5G SATA 120GB 5,400 rpm
5.4K SFF ETY HDD
458924-B21

Capacity	120,022MB	
Height	0.63 in (16.0 mm)	
Width	3.00 in (76.2 mm)	
Depth	5.38 in (136.6 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	1.5Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.5 ms
	Average	12 ms
	Full-Stroke	22 ms
Physical Configuration	Rotational Speed	5400 rpm
	Bytes/Sector	512
	Logical Blocks	234,441,648
Operating Temperature	41° to 122° F (5° to 50° C)	

HP 160GB 3G SATA 160GB 7,200 rpm
7.2K 3.5" ETY HDD
458945-B21

Capacity	160,041MB	
Height	1.04 in (26.4 mm)	
Width	4.36 in (110.7 mm)	
Depth	7.25 in (184.2 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	2.0 ms
	Average	<11 ms
	Full-Stroke	23.0 ms
Physical Configuration	Rotational Speed	7,200 rpm
	Bytes/Sector	512
	Logical Blocks	312,581,808
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications

SATA Non-Hot Plug Entry (ETY)_Drives

HP 120GB 1.5G SATA 120GB 5,400 rpm
5.4K NHP SFF ETY HDD
459357-B21

Capacity	120,022MB	
Height	0.591 in (15 mm)	
Width	2.750 in (69.85 mm)	
Depth	3.955 in (100.45 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	1.5Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.5 ms
	Average	12 ms
	Full-Stroke	22ms
Physical Configuration	Rotational Speed	5400 rpm
	Bytes/Sector	512
Operating Temperature	Logical Blocks	234,441,648
	41° to 122° F (5° to 50° C)	

HP 160GB 3G SATA 160GB 7,200 rpm
7.2K NHP 3.5" ETY HDD
458947-B21

Capacity	160,041MB	
Height*	1.028 in (26.1 mm)	
Width	4.00 in (101.6 mm)	
Depth*	5.787 in (147.0 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	N/A	
Seek Time (typical reads, including settling)	Single Track	2.0 ms
	Average	<11 ms
	Full-Stroke	23.0 ms
Physical Configuration	Rotational Speed	7,200 rpm
	Bytes/Sector	512
Operating Temperature	Logical Blocks	312,581,808
	41° to 131° F (5° to 55° C)	

*NOTE: Maximum drive dimension

Technical Specifications

SATA Hot Plug Midline (MDL) Drives

HP 250GB 3G SATA
7.2K 3.5" MDL HDD
458926-B21

250GB 7,200 rpm

Capacity	250,059MB	
Height	1.04 in (26.4 mm)	
Width	4.36 in (110.7 mm)	
Depth	7.25 in (184.2 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.0 ms
	Average	<8.5 ms
	Full-Stroke	17.0 ms
	Rotational Speed	7,200 rpm
Physical Configuration	Bytes/Sector	512
	Logical Blocks	488,397,168
Operating Temperature	41° to 131° F (5° to 55° C)	

HP 500GB 3G SATA
7.2K 3.5" MDL HDD
458928-B21

500GB 7,200 rpm

Capacity	500,107MB	
Height	1.04 in (26.4 mm)	
Width	4.36 in (110.7 mm)	
Depth	7.25 in (184.2 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.0 ms
	Average	<8.5 ms
	Full-Stroke	17.0 ms
	Rotational Speed	7,200 rpm
Physical Configuration	Bytes/Sector	512
	Logical Blocks	976,773,168
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications

HP 750GB 3G SATA 7.2K 3.5" MDL HDD
458930-B21

750GB 7,200 rpm

Capacity	750,156MB	
Height	1.04 in (26.4 mm)	
Width	4.36 in (110.7 mm)	
Depth	7.25 in (184.2 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.0 ms
	Average	<8.5 ms
	Full-Stroke	17.0 ms
Physical Configuration	Rotational Speed	7,200 rpm
	Bytes/Sector	512
	Logical Blocks	1,465,149,168
	Operating Temperature	41° to 131° F (5° to 55° C)

HP 1TB 3G SATA 7.2K 3.5" MDL HDD
454146-B21

1TB 7,200 rpm

Capacity	1,000,204MB	
Height	1.04 in (26.4 mm)	
Width	4.36 in (110.7 mm)	
Depth	7.25 in (184.2 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.0 ms
	Average	<8.5 ms
	Full-Stroke	17.0 ms
Physical Configuration	Rotational Speed	7,200 rpm
	Bytes/Sector	512
	Logical Blocks	1,953,525,168
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications

SATA Non-Hot Plug Midline (MDL) Drives

HP 250GB 3G SATA 250GB 7,200 rpm
7.2K NHP 3.5" MDL HDD
458939-B21

Capacity	250,059MB	
Height*	1.028 in (26.1 mm)	
Width	4.00 in (101.6 mm)	
Depth*	5.787 in (147.0 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	N/A	
Seek Time (typical reads, including settling)	Single Track	1.0 ms
	Average	<8.5 ms
	Full-Stroke	17.0 ms
Physical Configuration	Rotational Speed	7,200 rpm
	Bytes/Sector	512
	Logical Blocks	488,397,168
Operating Temperature	41° to 131° F (5° to 55° C)	

*NOTE: Maximum drive dimension

HP 500GB 3G SATA 500GB 7,200 rpm
7.2K NHP 3.5" MDL HDD
458941-B21

Capacity	500,107MB	
Height	1.028 in (26.1 mm)	
Width	4.00 in (101.6 mm)	
Depth	5.787 in (147.0 mm)	
Interface	Serial ATA	
Transfer Rate (Maximum)	3Gb/s	
Native Command Queuing	Supported	
Seek Time (typical reads, including settling)	Single Track	1.0 ms
	Average	<8.5 ms
	Full-Stroke	17.0 ms
Physical Configuration	Rotational Speed	7,200 rpm
	Bytes/Sector	512
	Logical Blocks	976,773,168
Operating Temperature	41° to 131° F (5° to 55° C)	

Technical Specifications

HP 750GB 3G SATA 750GB 7,200 rpm
7.2K NHP 3.5" MDL HDD
462595-B21

Capacity	750,156MB
Height	1.028 in (26.1 mm)
Width	4.00 in (101.6 mm)
Depth	5.787 in (147.0 mm)
Interface	Serial ATA
Transfer Rate (Maximum)	3Gb/s
Native Command Queuing	Supported
Seek Time (typical reads, including settling)	Single Track 1.0 ms Average <8.5 ms Full-Stroke 17.0 ms
Physical Configuration	Rotational Speed 7,200 rpm
	Bytes/Sector 512
	Logical Blocks 1,465,149,168
Operating Temperature	41° to 131° F (5° to 55° C)

Environment-friendly Products and Approach

End-of-life Management and Recycling

Hewlett-Packard offers end-of-life HP product return, trade-in, and recycling programs in many geographic areas. For trade-in information, please go to <http://www.hp.com/go/green>. To recycle your product, please go to: <http://www.hp.com/go/green> or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: <http://www.hp.com/go/green>. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

© Copyright 2008 Hewlett-Packard Development Company, L.P.

The information contained herein is subject to change without notice.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation. Linux is a registered trademark or trademark of Linus Torvalds in the U.S. and/or other countries. Red Hat is a registered trademark or trademark of Red Hat, Inc., in the U.S. and/or other countries.

The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

For hard drives, 1 GB = 1 billion bytes. Actual formatted capacity is less.